


SF-1F 翻边轴套规格及公差 SF-1F Flange Bushing Specification & Tolerance

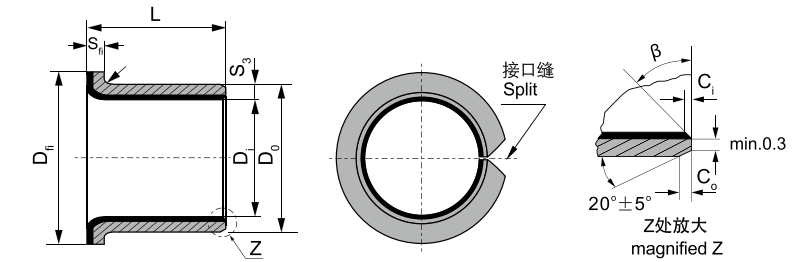

S_3	1.0	1.5	2.0	2.5
r	$1^{-0.5}$	1 ± 0.5	1.5 ± 0.5	2 ± 0.5

单位Unit: mm

轴径(f7) Shaft D_s	座孔(H7) Housing D_H	(OD) 外径公差 Tolerance D_o	(ID)压装后 内孔公差 After fixed $D_{i,a}$	配合间隙 Clearance C_o	Designation 型号规格	Wall thickness 壁厚 S_3	尺寸 Dimension					
							D_i	D_o	$D_f \pm 0.5$	$L \pm 0.25$	$S_f - 0.2$	
12 -0.016 -0.034	14 +0.018	14 +0.065 +0.030	12.058 11.990	0.092 0.006	SF-10F12070	1.005 0.980	12	14	20	7	1	
					SF-10F12090					9		
					SF-10F12120					12		
14 -0.016 -0.034	16 +0.018	16 +0.065 +0.030	14.058 13.990	●	SF-10F14120	●	14	16	22	12	●	
					SF-10F14170				17			
					SF-10F15090				9			
15 -0.016 -0.034	17 +0.018	17 +0.065 +0.030	15.058 14.990	●	SF-10F15120	●	15	17	23	12	●	
					SF-10F15170				17			
					SF-10F16120				12	●		
16 -0.016 -0.034	18 +0.018	18 +0.065 +0.030	16.058 15.990	●	SF-10F16170	●	16	18	24		17	●
					SF-10F18120				12			
					SF-10F18170				17			
18 -0.016 -0.034	20 +0.021	20 +0.075 +0.035	18.061 17.990	0.095 0.006	SF-10F18200	●	18	20	26	17	●	
					SF-10F20115				11.5			
					SF-10F20165				16.5			
20 -0.020 -0.041	23 +0.021	23 +0.075 +0.035	20.071 19.990	0.112 0.010	SF-10F20215	1.505 1.475	20	23	30	21.5	1.5	
					SF-10F22150				15			
					SF-10F22200				20			
22 -0.020 -0.041	25 +0.021	25 +0.075 +0.035	22.071 21.990	●	SF-10F25115	●	22	25	32	20	●	
					SF-10F25165				16.5			
					SF-10F25215				21.5			
25 -0.020 -0.041	28 +0.021	28 +0.075 +0.035	25.071 24.990	●	SF-10F30160	2.005 1.970	25	28	35	16.5	●	
					SF-10F30260				26			
					SF-10F35160				16			
30 -0.025 -0.050	34 +0.025	34 +0.075 +0.035	30.085 29.990	0.126 0.010	SF-10F35260	●	30	34	42	26	2	
					SF-10F40260				26			
					SF-10F40400				40			
35 -0.025 -0.050	39 +0.025	39 +0.085 +0.045	35.085 34.990	0.135 0.015	SF-10F40260	●	35	39	47	26	●	
					SF-10F40400				40			
					SF-10F40400				40			
40 -0.025 -0.050	44 +0.025	44 +0.085 +0.045	40.085 39.990	●	SF-10F40260	●	40	44	53	40	●	
					SF-10F40400				40			
					SF-10F40400				40			